
Steel Strap

ECKO Steel straps are a versatile fixing option widely specified in NZS3604:2011 for stud to bottom/top plate, lintel and rafter connections. ***As per NZS3604:2011*** a 6kN capacity can be achieved with one strap (6/30 x 3.15mm nails each end) or 12kN with two straps (6/30 x 3.15mm nails each end).


BRANZ Appraised
Appraisal No. 1320

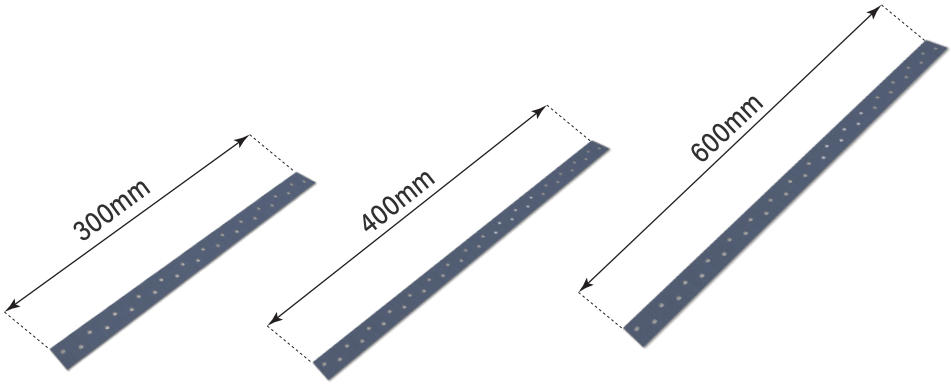

Available in:
300, 400 & 600mm lengths
Materials:
25 x 1.0mm G300 Z275 Galvanised Steel - *Internal Use (NZS3604:2011 - Closed Environment)*
25 x 1.0mm 304 Stainless Steel - *External Use (NZS3604:2011 - Sheltered & Exposed Environment)*

Stud-to-Timber Floor Tie-Down

Note: 6pcs of 30 x 3.15mm nails required in each end of strap to achieve required rating.

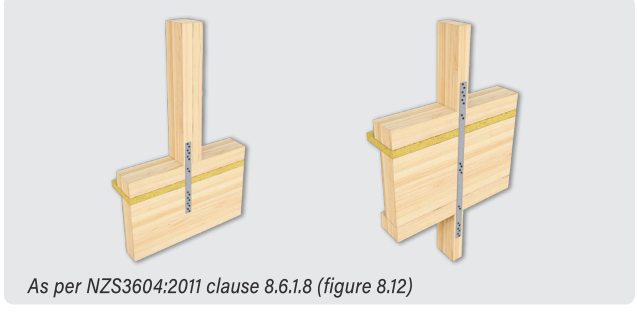

As per NZS3604:2011 clause 8.6.1.8 (figure 8.12)



As per NZS3604:2011 clause 8.6.1.8 (figure 8.12)

Stud-to-Bottom Plate Fixing

Note: Strap must be taken under bottom plate and 150mm up each side with 6pcs of 30 x 3.15mm nails required in each end of strap to achieve required rating.



As per NZS3604:2011 clause 8.6.1.8 (figure 8.12)

Lintel Fixing

Note: 6pcs of 30 x 3.15mm nails required in each end of strap to achieve required rating.

Steel Strap Ranging			
Product Code	Length (mm)	Description	PCS / Pack
BSBS300-100	300	Steel Strap Z275 Galvanised 300mm	100
BSBS400-100	400	Steel Strap Z275 Galvanised 400mm	100
BSBS600-100	600	Steel Strap Z275 Galvanised 600mm	100
BSBS300SS-100	300	Steel Strap 304 Stainless Steel 300mm	100
BSBS400SS-100	400	Steel Strap 304 Stainless Steel 400mm	100
BSBS600SS-100	600	Steel Strap 304 Stainless Steel 600mm	100